

Specifications/Features

Fixture

Fully adjustable: 180° vertical swivel and 360° horizontal swivel for accent or downlighting applications.

Fixture can be further customized with accessories.

Fixture is milled from solid brass and finished in hand-polished chrome, platinum or black.

Available in 5 different lengths: 2", 4", 7-3/4", 11-3/4" and 19-3/4".

Mounting

SL: Standard rail mount. Allows the fixture to be conveniently mounted anywhere along the rail system up to the maximum capacity of the circuit.

Lamp

(1) 50W (max.) MR16 FG lamp, GU5.3 base or compatible LED lamp (by others).

Available Finishes

All surfaces are hand finished over solid brass



Rated for 12 volts.

Labels/Usage

CSA/us Listed




Deco Snoot

1-1/2" Ø 2-1/4"

The **Deco Snoot** is a glare reducing, low surface brightness accessory.

The sleek Black snoot extends 1½" beyond the MR16 light source, all but eliminating glare.

Available for our ATTO and VARIAN Series fixtures.

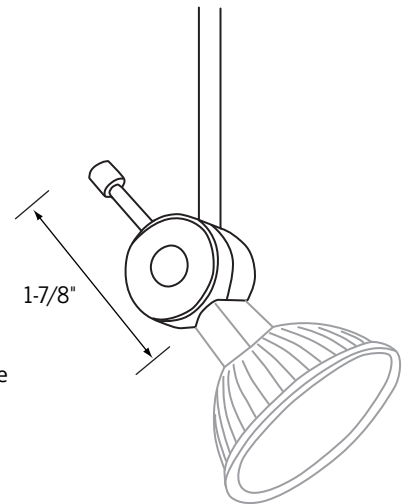

Ordering Information

Example Order: -

Mounting

Fixture

Finish

Light Control Accessories

SL - Rail Mounted Fixtures
SP - Pendant Model for Remote Transformer
SPT - 120V Pendant Series with Built-In Step-Down 60W Electronic Transformer 120/12V

8050- 2"
8100- 4"
8200- 7-3/4"
8300- 11-3/4"
8500- 19-3/4"

C - Polished Chrome
PL - Platinum
B - Black



LS Linear Spread Lens. Use with FASO-16 holder.
SL Soft Light (diffuser) Use with FASO-16 holder.
FA-16 Hex Cell Louver, Black Use with FASO-16 holder.
FAS-16 Natural Aluminum Accessory Holder. Allows for Two Control Elements Max.
DS - Deco Snoot - Black

